



ООО "Судтехсервис" официальный представитель в России



NORTHEAST PETROLEUM UNIVERSITY

THT

JINBIN VALVE

198035, г. Санкт-Петербург, ул. Степана Разина, д. 13
Тел.: (812) 334-91-16, 251-30-45; Тел./факс: (812) 334-95-30
e-mail: sts.marine@gmail.com <http://sts-marine.com>

>>>
Valve Selection

Northeast Petroleum University

TIANJIN TANGGU JINBIN VALVE CO.,LTD.



东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT
津滨阀门
JINBIN VALVE

用科技和服务缔造品牌
Build our brand with technology and service

东北石油大学，简称“东油”，坐落在我国最大的石油石化基地黑龙江省大庆市，是伴随中国最大的油田大庆油田的发现而诞生的一所全国重点大学，是国家“卓越工程师教育培养计划”、“国家大学生创新性实验计划”入选高校，是中国石油天然气集团公司（简称中石油）、中国石油化工集团公司（简称中石化）、中国海洋石油总公司（简称中海油）和黑龙江省四部共同建设高校。

东北石油大学源于清华大学石油炼制系，孕育于北京石油学院，诞生发展于大庆油田，是大庆油田大会战的重要成果之一。学校前身东北石油学院创建于1960年5月，1975年7月更名为大庆石油学院，2010年4月正式更名为东北石油大学。中石油、中石化、中海油的多位总裁、副总裁毕业于此，被誉为石油界的“黄埔军校”。



校训石



教学主楼



校园一角



校园风景



体育场

东北石油大学用大庆精神办学育人，培养了以苏树林、王玉普、傅成玉、胡文瑞、何树山等为代表的一批又一批时代英才，被誉为“石油工程师的摇篮”。

东北石油大学在办学过程中受到党和国家领导、省部级领导、企事业单位领导的重视和媒体的广泛关注。党和国家领导、省部级领导、企事业单位领导在前来学校视察和指导工作过程中都对学校改革、建设和发展成就给予了充分的肯定。李鹏总理题词“用大庆精神育人，培养跨世纪人才”；2005年，时任教育部部长周济视察学校时，也对学校47年的办学成就给予了充分肯定。






TJHT

Build our brand with technology and service

NORTHEAST PETROLEUM UNIVERSITY JINBIN VALVE

Butterfly Valve Series



手动对夹式蝶阀 Manual wafer butterfly valve	
产品型号 Product model	D71X-10/16
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-15℃~150℃



无销蝶阀 Without pin butterfly valve	
产品型号 Product model	WD71X-10/16
公称通径 Nominal diameter	DN50~300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、污水等 water, sewage etc.
适用温度 Suitable temperature	-15℃~150℃

无销四氟覆层对夹式蝶阀 Nylon or PTFE lined wafer butterfly valve	
产品型号 Product model	WD71F-10/16
公称通径 Nominal diameter	DN40~150mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	耐硫酸、碱、海水、污水、油品、气体等 Proof vitrid, alkali, seawater, sewage, oil and gas etc.
适用温度 Suitable temperature	10℃~150℃



无销衬胶对夹式蝶阀 Rubber lined wafer butterfly valve	
产品型号 Product model	WD71X7-10/16
公称通径 Nominal diameter	DN40~150mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	耐酸、碱、海水、污水、油品、气体等 Proof vitrid, alkali, seawater, sewage, oil and gas etc.
适用温度 Suitable temperature	-23℃~200℃

手柄脱硫对夹蝶阀 Manual desulfurization wafer butterfly valve	
产品型号 Product model	TLD71X-10/16
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	石灰石膏液、酸碱等 Lime plaster solution, PH, etc.
适用温度 Suitable temperature	-35℃~150℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

蝶
阀

气动对夹式蝶阀
Pneumatic actuated wafer butterfly valve

产品型号 Product model	D671X-10/16
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-15℃~150℃



气动对夹式蝶阀
Pneumatic actuated wafer butterfly valve

产品型号 Product model	D671X-10/16
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-15℃~150℃

精小型电动对夹式蝶阀
Electric actuated wafer butterfly valve

产品型号 Product model	D971X-10/16
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-15℃~150℃



802型电动对夹式蝶阀
Electric actuated wafer butterfly valve

产品型号 Product model	D971X-10/16
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-15℃~150℃

加长杆蝶阀
Lengthens butterfly valve

产品型号 Product model	D371X-10/16
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-23℃~121℃



LT型蜗轮传动单夹式蝶阀 LT Worm actuated single-wafer butterfly valve	
产品型号 Product model	LTD371X-10/16
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水, 气, 油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-15℃~150℃



手柄沟槽蝶阀 Groove end butterfly valve	
产品型号 Product model	ZSDF-□-KG
公称通径 Nominal diameter	DN50~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水 Water
适用温度 Suitable temperature	-15℃~200℃

蜗轮沟槽信号蝶阀 Groove end signal butterfly valve	
产品型号 Product model	ZSXF-□-D-KG
公称通径 Nominal diameter	DN50~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水 Water
适用温度 Suitable temperature	-15℃~200℃



电动沟槽蝶阀 Electric groove end butterfly valve	
产品型号 Product model	ZSDF-□-KG-DD
公称通径 Nominal diameter	DN50~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水 Water
适用温度 Suitable temperature	-15℃~200℃

消防信号蝶阀 Fire fighting signal butterfly valve	
产品型号 Product model	ZSXF-□-D
公称通径 Nominal diameter	DN50~250mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水 Water
适用温度 Suitable temperature	-23℃~121℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TJBT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

蝶
阀

手动防结露蝶阀
Manual anti-condensation butterfly valve

产品型号 Product model	D71X-10/16
公称通径 Nominal diameter	DN40~150mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-45℃~135℃



蜗轮防结露蝶阀
Worm anti-condensation butterfly valve

产品型号 Product model	D371X-10/16
公称通径 Nominal diameter	DN40~300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-45℃~135℃

气动全四氟蝶阀
Pneumatic PTFE full lined butterfly valve

产品型号 Product model	D671F-10/16
公称通径 Nominal diameter	DN50~500mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	各种腐蚀性介质 Various corrosiveness medium
适用温度 Suitable temperature	10℃~150℃



手动法兰蝶阀
Manual flanged butterfly valve

产品型号 Product model	D41X-10/16
公称通径 Nominal diameter	DN50~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-23℃~121℃

蜗轮传动法兰蝶阀
Worm actuated flanged butterfly valve

产品型号 Product model	D341X-10/16
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-23℃~121℃



蜗轮脱硫法兰蝶阀 Worm desulfurization flange butterfly valve	
产品型号 Product model	TLD341X-10/16
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	石灰石膏液、酸碱等 Lime plaster solution, PH, etc.
适用温度 Suitable temperature	-35℃~150℃



气动法兰蝶阀 Pneumatic flange butterfly valve	
产品型号 Product model	D641X-10/16
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-23℃~121℃

电动法兰蝶阀 Electric-actuated flanged butterfly valve	
产品型号 Product model	D941X-10/16
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-23℃~121℃



法兰伸缩蝶阀 Flex flanged butterfly valve	
产品型号 Product model	SD341X-10/16
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	≤ 80℃

不锈钢法兰蝶阀 Stainless steel flanged butterfly valve	
产品型号 Product model	D341X-16/25P
公称通径 Nominal diameter	DN50~1200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-15℃~150℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

蝶
阀

加长杆法兰蝶阀
Lengthens flange butterfly valve

产品型号 Product model	D941X-10/16
公称通径 Nominal diameter	DN40~1200mm
公称压力 Nominal pressure	PN10~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-23℃~121℃



蜗轮传动法兰偏心蝶阀

Worm-actuated eccentric flanged butterfly valve

产品型号 Product model	D343X-10/16
公称通径 Nominal diameter	DN100~3000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	污水、海水、气体等 Sewage, seawater gas etc.
适用温度 Suitable temperature	-10℃~80℃

伸缩偏心法兰蝶阀
Eccentric Flanged Butterfly stretch

产品型号 Product model	SD343X-10/16
公称通径 Nominal diameter	DN100~3000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	污水、海水、气体等 Sewage, seawater gas etc.
适用温度 Suitable temperature	-10℃~80℃



电动法兰通风蝶阀

Electric actuated flange ventilates butterfly valve

产品型号 Product model	TD941W-0.6
公称通径 Nominal diameter	DN100~4000mm
公称压力 Nominal pressure	PN0.05~0.6MPa
适用介质 Suitable medium	煤气、烟气等 Coal gas, flue gas etc.
适用温度 Suitable temperature	-10℃~350℃



手动硬密封对夹蝶阀

Manual metal-seat wafer butterfly valve

产品型号 Product model	D73H/F-16/25C
公称通径 Nominal diameter	DN40~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 water, gas and oil etc.
适用温度 Suitable temperature	≤425℃



硬密封对夹蝶阀 Metal-seat wafer butterfly valve	
产品型号 Product model	D373H-16/25C
公称通径 Nominal diameter	DN50~2000mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 water, gas and oil etc.
适用温度 Suitable temperature	≤425℃



手动硬密封法兰蝶阀 Manual metal-seat flange butterfly valve	
产品型号 Product model	D43H/F-16/25C
公称通径 Nominal diameter	DN40~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 water, gas and oil etc.
适用温度 Suitable temperature	≤425℃

硬密封法兰蝶阀 Metal-seat flanged butterfly valve	
产品型号 Product model	D343H-16/25C
公称通径 Nominal diameter	DN50~2000mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 water, gas and oil etc.
适用温度 Suitable temperature	≤425℃



气动硬密封法兰蝶阀 Pneumatic metal-seat flanged butterfly valve	
产品型号 Product model	D643H-16/25C
公称通径 Nominal diameter	DN50~1200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 water, gas and oil etc.
适用温度 Suitable temperature	≤425℃

焊接连接金属密封蝶阀 Butt weld type metal sealing butterfly valve	
产品型号 Product model	D363H-16/25C
公称通径 Nominal diameter	DN80~2000mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 water, gas and oil etc.
适用温度 Suitable temperature	≤425℃



止回阀系列

Check Valve Series



铸铁升降式止回阀
Iron-cast lift check valve

产品型号 Product model	H41T/W/X-10/16
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、蒸汽等 Water, steam, etc.
适用温度 Suitable temperature	≤120℃



铸铁旋启式止回阀
Iron-cast swing start check valve

产品型号 Product model	H44T/W/X-10/16
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、蒸汽等 Water, steam, etc.
适用温度 Suitable temperature	≤120℃

升降式止回阀
Lift check valve

产品型号 Product model	H41H-16/25C
公称通径 Nominal diameter	DN15~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤425℃



旋启式止回阀
Swing check valve

产品型号 Product model	H44H-16/25C
公称通径 Nominal diameter	DN50~900mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤425℃

对夹圆片止回阀
Wafer swing check valve

产品型号 Product model	H74X/H-10/16/25C/P
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水、油、酸碱液体等 Water, oil, PH liquid etc.
适用温度 Suitable temperature	≤400℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

对夹式蝶型止回阀
Double disc check valve

产品型号 Product model	DH77X-10/16
公称口径 Nominal diameter	DN50~700mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas, oil etc.
适用温度 Suitable temperature	-15℃~150℃



全不锈钢蝶式止回阀
Stainless steel butterfly check valve

产品型号 Product model	H76W-16/25P
公称口径 Nominal diameter	DN50~700mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas, oil etc.
适用温度 Suitable temperature	-10℃~120℃

锻钢止回阀
Forged check valve

产品型号 Product model	H44H-150Lb
公称口径 Nominal diameter	NPS1/2"~2" inch
公称压力 Nominal pressure	Class150~600Lb
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	-196℃~600℃



衬氟塑料止回阀
Lining fluorine plastic check valve

产品型号 Product model	H41F46-16/25C
公称口径 Nominal diameter	DN20~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	强腐蚀性流体 Strong corrosive fluid
适用温度 Suitable temperature	≤120℃

立式止回阀
Vertical lift check valve

产品型号 Product model	H42H-16/25C
公称口径 Nominal diameter	DN20~500mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~350℃



止
回
阀

立卧两用静音止回阀
Silent check valve for both vertical and horizontal installation

产品型号 Product model	H41M-16/25C
公称通径 Nominal diameter	DN15~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 300 °C



美标升降式止回阀
API Lift check valves

产品型号 Product model	H41H-150Lb
公称通径 Nominal diameter	NPS2"~12" inch
公称压力 Nominal pressure	Class150~900Lb
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	0 °C~425 °C

美标旋启式止回阀
API Swing check valves

产品型号 Product model	H44H-300Lb
公称通径 Nominal diameter	NPS2"~24" inch
公称压力 Nominal pressure	Class150~1500Lb
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	0 °C~425 °C



消声止回阀
Silent check valve

产品型号 Product model	HC41X-10/16
公称通径 Nominal diameter	DN40~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水及弱酸性流体等 Water and acidic fluid etc.
适用温度 Suitable temperature	0 °C~80 °C

静音止回阀
Silent check valve

产品型号 Product model	HC42X-10/16
公称通径 Nominal diameter	DN50~350mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	0 °C~80 °C





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

滑道滚球式止回阀
Slideway bowl type check valve

产品型号 Product model	HQ41X-10/16
公称口径 Nominal diameter	DN50~350mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水及弱酸性流体等 Water and acidic fluid etc.
适用温度 Suitable temperature	0℃~80℃



橡胶瓣止回阀
Rubber flap check valve

产品型号 Product model	SFCV-10/16/25C
公称口径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	清水、污水、海水等 Clear water, sewage, sea water etc.
适用温度 Suitable temperature	0℃~80℃



微阻球形止回阀
Microresistance ball check valve

产品型号 Product model	HQ44/45X-10/16
公称口径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水及弱酸性流体等 Water and acidic fluid etc.
适用温度 Suitable temperature	0℃~80℃



多功能三合一止回阀
Multi-functional three-in-one check valve

产品型号 Product model	JLH-10/16/25C
公称口径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水、油等 water oil etc.
适用温度 Suitable temperature	0℃~80℃



美标气动微阻缓闭止回阀
API Pneumatic micro-slow close check valve

产品型号 Product model	HH644X-150Lb
公称口径 Nominal Diameter	NPS2"-56" inch
公称压力 Nominal Pressure	Class150~300Lb
适用介质 Suitable medium	水、污水等 Water, sewage etc.
适用温度 Suitable temperature	0℃~120℃

止
回
阀

微阻缓闭重锤式止回阀
Check valve with damper and weight

产品型号 Product model	HH44X-10/16/25C
公称通径 Nominal diameter	DN40~800mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水及弱酸性流体等 Water and acidic fluid etc.
适用温度 Suitable temperature	0℃~80℃



微阻缓闭消声止回阀
Butterfly type check valve with clamber and weight

产品型号 Product model	DHH44X/H-10/16/25C
公称通径 Nominal diameter	DN200~2000mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	清水、污水、海水等 Clear water, sewage, sea water etc.
适用温度 Suitable temperature	0℃~80℃

蝶式缓冲止回阀
Butterfly amortize check valve

产品型号 Product model	HH47X-10/16/25C
公称通径 Nominal diameter	DN200~1400mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水、油品、海水、污水等 Water, oil quality, sea water, sewage etc.
适用温度 Suitable temperature	0℃~80℃



微阻缓闭蝶式止回阀
Slow close check valve

产品型号 Product model	HH48/49X-10/16/25C
公称通径 Nominal diameter	DN40~1200mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	清水、污水、海水等 Clear water, sewage, sea water etc.
适用温度 Suitable temperature	0℃~80℃





大口径止回阀
Heavy-caliber check valve

产品型号 Product model	CVKR--10/16/25C
公称通径 Nominal diameter	DN300~1200mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~80℃



闸阀系列

Gate Valve Series

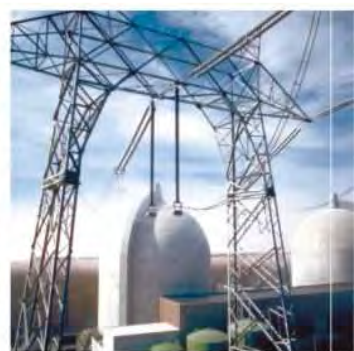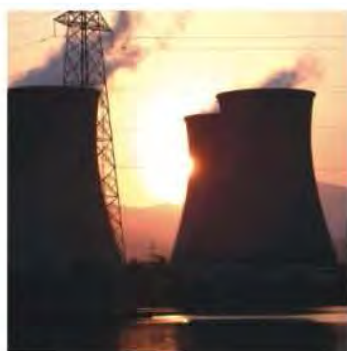

铸铁闸阀
Iron cast gate valve

产品型号 Product model	Z41T/W-10/16
公称通径 Nominal diameter	DN40~500mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤120℃



平行式双闸板闸阀
Double disk parallel gate valve

产品型号 Product model	Z44T/W-10/16
公称通径 Nominal diameter	DN40~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤120℃

铸铁暗杆闸阀
Iron cast dark pole gate valve

产品型号 Product model	Z45T-10/16
公称通径 Nominal diameter	DN40~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤120℃



暗杆楔式地下闸阀
Dark pole wedge type underground gate valve

产品型号 Product model	SZ45T-10/16
公称通径 Nominal diameter	DN40~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤120℃

伞齿轮暗杆闸阀
Bevel gear dark pole gate valve

产品型号 Product model	Z545T/W-10/16
公称通径 Nominal diameter	DN450~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤120℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

电动明杆平行双闸板闸阀
Electric double disk parallel gate valve

产品型号 Product model	Z944T/W-10/16
公称通径 Nominal diameter	DN100~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤120℃



大口径电动楔式闸阀
Large-diameter electric wedge gate valve

产品型号 Product model	Z941T/W-10/16
公称通径 Nominal diameter	DN300~2000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤200℃

城市煤气快速启闭闸阀
City gas rapid opening and closing the gate valve

产品型号 Product model	MZ548W-10/16
公称通径 Nominal diameter	DN150~2000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤120℃



消防信号闸阀
Fire signal gate valve

产品型号 Product model	ZSXF-□-Z
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水 Water
适用温度 Suitable temperature	-10℃~80℃

消防闸阀
Fire gate valve

产品型号 Product model	ZSZF-□
公称通径 Nominal diameter	DN40~150mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水 Water
适用温度 Suitable temperature	-10℃~80℃



闸
阀

明杆弹性座封闸阀 Rising resilient seated gate valve	
产品型号 Product model	Z41X-10/16
公称通径 Nominal diameter	DN40~300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、饮用水、污水等 Water, drinking water, sewage etc.
适用温度 Suitable temperature	-10℃~80℃



暗杆弹性座封闸阀 Non rising resilient seated gate valve	
产品型号 Product model	Z45X-10/16
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、饮用水、污水等 Water, drinking water, sewage etc.
适用温度 Suitable temperature	-10℃~80℃

地下弹性座封闸阀 Underground resilient seated gate valve	
产品型号 Product model	SZ45X-10/16
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、饮用水、污水等 Water, drinking water, sewage etc.
适用温度 Suitable temperature	-10℃~80℃



电动弹性座封闸阀 Electric actuated resilient seated gate valve	
产品型号 Product model	Z945X-10/16
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、饮用水、污水等 Water, drinking water, sewage etc.
适用温度 Suitable temperature	-10℃~80℃

大口径软密封电动闸阀 Electric large diameter rubber-seat gate valve	
产品型号 Product model	Z945X-10/16
公称通径 Nominal diameter	DN500~1200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、饮用水、污水等 Water, drinking water, sewage etc.
适用温度 Suitable temperature	≤ 500℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

铸钢闸阀
Cast steel gate valve

产品型号 Product model	Z41H-16/25C
公称通径 Nominal diameter	DN15~1200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 500℃



不锈钢闸阀
Stainless steel gate valve

产品型号 Product model	Z41W-16/25P
公称通径 Nominal diameter	DN15~600mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~425℃



铬钼钢闸阀
Chromium molybdenum steel gate valve

产品型号 Product model	Z41Y-16/25I
公称通径 Nominal diameter	DN10~50mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 500℃



气动闸阀
Pneumatic actuated gate valve

产品型号 Product model	Z640H-16/25C
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 500℃



电动闸阀
Electric motor wedge gate valve

产品型号 Product model	Z941H-16/25C
公称通径 Nominal diameter	DN40~1200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 500℃

闸
阀

锻钢法兰闸阀 Forged steel flange gate valve	
产品型号 Product model	Z41H-16/25C
公称通径 Nominal diameter	DN15~65mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	≤ 425 °C



美标法兰闸阀 API flanged gate valve	
产品型号 Product model	Z41W/Y-150Lb
公称通径 Nominal diameter	NPS2"~48" inch
公称压力 Nominal pressure	Class150~2500Lb
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 600 °C

波纹管闸阀 Bellows gate valve	
产品型号 Product model	WZ41H-16/25C
公称通径 Nominal diameter	DN15~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 300 °C



水封闸阀 Water nsealed gate valve	
产品型号 Product model	SZ44H-16/25C
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 550 °C

电动排渣闸阀 Electric actuated dregs eduction gate valve	
产品型号 Product model	PZ941H-16/25C
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 425 °C





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

手动平板闸阀
Manual flat gate valve

产品型号 Product model	PZ43/44F-16/25C
公称通径 Nominal diameter	DN50-1000mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、天然气、石油等 Water, natural gas, oil etc.
适用温度 Suitable temperature	-29℃~250℃



气动平板闸阀
Pneumatic actuated flat gate valve

产品型号 Product model	PZ643/644H-16/25C
公称通径 Nominal diameter	DN50-1000mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、天然气、石油等 Water, natural gas, oil etc.
适用温度 Suitable temperature	-29℃~250℃

电动平板闸阀
Electric actuated flat gate valve

产品型号 Product model	PZ943/944H-16/25C
公称通径 Nominal diameter	DN50-1000mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、天然气、石油等 Water, natural gas, oil etc.
适用温度 Suitable temperature	-29℃~250℃



焊接锻钢闸阀
Welding forged steel gate valve

产品型号 Product model	Z61H-800Lb
公称通径 Nominal diameter	NPS1/4"~2" inch
公称压力 Nominal pressure	Class150~800Lb
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	≤425℃

锻钢延长阀体闸阀
Forged steel extended body gate valve

产品型号 Product model	Z61Y-600Lb
公称通径 Nominal diameter	NPS3/8"~2" inch
公称压力 Nominal pressure	Class900~2500Lb
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	-29℃~550℃



闸
阀

双向软密封插板阀 Two-way soft seal flapper valve	
产品型号 Product model	Z73X-10
公称通径 Nominal diameter	DN200~2000mm
公称压力 Nominal pressure	PN0.4~1.0MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	-23℃~100℃



刀型闸阀 Knife gate valve	
产品型号 Product model	Z73W-10/16/25C/P
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水、纸浆等 Water, paper pulp etc.
适用温度 Suitable temperature	-10℃~120℃

蜗轮传动浆闸阀 Worm actuated sera gate valve	
产品型号 Product model	Z573X-10/16/25C/P
公称通径 Nominal diameter	DN50~900mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水、煤浆、纸浆等 Water, coal thick liquid, paper pulp etc.
适用温度 Suitable temperature	-10℃~120℃



气动刀型闸阀 Pneumatic actuated knife gate valve	
产品型号 Product model	Z673W-10/16/25C/P
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水、纸浆等 Water, paper pulp etc.
适用温度 Suitable temperature	-10℃~120℃

电动刀型闸阀 Electric knife gate valve	
产品型号 Product model	Z973W-10/16/25C/P
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	水、纸浆等 Water, paper pulp etc.
适用温度 Suitable temperature	-10℃~120℃



截止阀系列

Globe Valve Series



铸铁法兰截止阀 Iron cast flanged globe valve	
产品型号 Product model	J41T/W-10/16
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、汽等 Water, gas etc.
适用温度 Suitable temperature	≤200℃



铸钢截止阀 Cast steel globe valve	
产品型号 Product model	J41H-16/25C
公称通径 Nominal diameter	DN10~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas, and oil etc.
适用温度 Suitable temperature	≤550℃

不锈钢截止阀 Stainless steel globe valve	
产品型号 Product model	J41W-16/25P
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	耐酸、碱等 Acidproof and alkali etc.
适用温度 Suitable temperature	-10℃~250℃



气动截止阀 Pneumatic globe valve	
产品型号 Product model	J641H-16/25C
公称通径 Nominal diameter	DN50~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas, and oil etc.
适用温度 Suitable temperature	≤550℃

电动截止阀 Electric globe valve	
产品型号 Product model	J941H-16/25C
公称通径 Nominal diameter	DN10~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas, and oil etc.
适用温度 Suitable temperature	≤550℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

B型不锈钢内螺纹截止阀
Stainless steel internal thread globe valve

产品型号 Product model	J11W-16/25P
公称通径 Nominal diameter	DN15~65mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas, and oil etc.
适用温度 Suitable temperature	-20℃~350℃



S型不锈钢内螺纹截止阀
Stainless steel internal thread globe valve

产品型号 Product model	J11W-16/25P
公称通径 Nominal diameter	DN15~65mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas, and oil etc.
适用温度 Suitable temperature	-20℃~350℃

波纹管截止阀
Bellows globe valve

产品型号 Product model	WJ41H-16/25C
公称通径 Nominal diameter	DN15~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, and oil etc.
适用温度 Suitable temperature	-20℃~350℃



锻钢截止阀
Forged steel globe valve

产品型号 Product model	J61H-800Lb
公称通径 Nominal diameter	NPS1/4"~2" inch
公称压力 Nominal pressure	Class150~800Lb
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, and oil etc.
适用温度 Suitable temperature	≤425℃

锻钢截止阀
Forged steel globe valve

产品型号 Product model	J41H-300Lb
公称通径 Nominal diameter	NPS3/8"~2" inch
公称压力 Nominal pressure	Class150~600Lb
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, and oil etc.
适用温度 Suitable temperature	≤425℃



截
止
阀

衬氟塑料截止阀 Lining fluorine plastic globe valve	
产品型号 Product model	J41F46-16/25C
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	强腐蚀性流体 Strong corrosive fluid
适用温度 Suitable temperature	≤ 120℃



衬氟截止阀 Fluorine-lined globe valve	
产品型号 Product model	J44F46-16/25C
公称通径 Nominal diameter	DN20~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	强腐蚀性流体 Strong corrosive fluid
适用温度 Suitable temperature	≤ 120℃

水封截止阀 Water nsealed globe valve	
产品型号 Product model	SJ61H-16/25C
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 550℃



压力自紧密封阀盖电动Y型截止阀 Pressure seal valve cover electric drive Y type globe valve	
产品型号 Product model	J965H/Y-2500
公称通径 Nominal diameter	DN50~350mm
公称压力 Nominal pressure	Class2500Lb
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~570℃

美标截止阀 API globe valve	
产品型号 Product model	J41H-150Lb
公称通径 Nominal diameter	NPS2"~12" inch
公称压力 Nominal pressure	Class150~300Lb
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	≤ 450℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

氧气专用截止阀
Oxygen special globe valve

产品型号 Product model	YJ41H-16/25P
公称通径 Nominal diameter	DN15~400mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	氧气、氮气等 Oxygen, nitrogen etc.
适用温度 Suitable temperature	-20℃~150℃



丝扣柱塞阀
Threaded plunger valve

产品型号 Product model	U11SM-10/16
公称通径 Nominal diameter	DN15~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, and oil etc.
适用温度 Suitable temperature	-20℃~250℃

柱塞阀
Plunger valve

产品型号 Product model	U41SM-10/16
公称通径 Nominal diameter	DN15~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, and oil etc.
适用温度 Suitable temperature	-20℃~250℃



二通旋塞阀
Two pass plug valves

产品型号 Product model	X43W-10/16
公称通径 Nominal diameter	DN20~300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、酸碱类等 Water, acid alkaline etc.
适用温度 Suitable temperature	≤ 200℃

三通旋塞阀
Three pass plug valves

产品型号 Product model	X44W-10/16
公称通径 Nominal diameter	DN20~300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、酸碱类等 Water, acid alkaline etc.
适用温度 Suitable temperature	≤ 200℃



截
止
阀

用科技和服务缔造品牌
Build our brand with technology and service



球阀系列

Ball Valve Series





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

铸铁球阀
Iron cast ball valve

产品型号 Product model	Q41F-10/16
公称通径 Nominal diameter	DN50~150mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤150℃



铸钢法兰球阀
Cast steel flanged ball valve

产品型号 Product model	Q41F-16/25C
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~150℃

不锈钢法兰球阀
Stainless steel flanged ball valve

产品型号 Product model	Q41F-16/25P
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	耐腐蚀等 Corrosion preventive etc.
适用温度 Suitable temperature	-10℃~150℃



衬氟塑料球阀
Lining fluorine plastic ball valve

产品型号 Product model	Q41F46-10/16
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	强腐蚀性流体 Strong corrosive fluid
适用温度 Suitable temperature	≤120℃

电动法兰球阀
Electric actuated flanged ball valve

产品型号 Product model	Q941F-16/25C
公称通径 Nominal diameter	DN15~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气体、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~150℃



球
阀

固定球阀
Fixed ball valve

产品型号 Product model	Q347F-16/25C
公称通径 Nominal diameter	DN150~1400mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	≤ 250℃



金属硬密封固定球阀
Metal seal fixed ball valve

产品型号 Product model	WQ41H-16/25C
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	≤ 550℃

气动固定法兰球阀
Pneumatic actuated fixed flanged ball valve

产品型号 Product model	Q647F-16/25C
公称通径 Nominal diameter	DN15~400mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	-40℃~200℃



电动固定球阀
Electric fixed ball valve

产品型号 Product model	Q947S/F-16/25C
公称通径 Nominal diameter	DN150~1400mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	≤ 200℃

侧装式偏心半球阀
Side-mounted eccentric half ball valve

产品型号 Product model	Q340F-10/16/25C
公称通径 Nominal diameter	DN40~2000mm
公称压力 Nominal pressure	PN1.0~2.5MPa
适用介质 Suitable medium	煤灰、煤粉、泥浆等 Coal ash, pulverized coal, mud etc.
适用温度 Suitable temperature	≤ 425℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

手柄传动式焊接球阀
Handle drive type welding ball valve

产品型号 Product model	Q61F-16/25C
公称通径 Nominal diameter	DN10~50mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品、天然气等 Water, gas, oil, natural gas etc.
适用温度 Suitable temperature	-29~200℃



埋地式热力球阀 (短体型)
Buried heat ball valve (short body)

产品型号 Product model	Q61F-16/25C
公称通径 Nominal diameter	DN25~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品、天然气等 Water, gas, oil, natural gas etc.
适用温度 Suitable temperature	-29~200℃

法兰焊接球阀
Flange welding ball valve

产品型号 Product model	Q61F-16/25C
公称通径 Nominal diameter	DN15~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品、天然气等 Water, gas, oil, natural gas etc.
适用温度 Suitable temperature	-29~200℃



法兰水平齿轮传动式焊接球阀
Flange horizontal gear type welding ball valve

产品型号 Product model	Q361F-16/25C
公称通径 Nominal diameter	DN100~600mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品、天然气等 Water, gas, oil, natural gas etc.
适用温度 Suitable temperature	-29~200℃

缩径排气埋地式球阀(长体型)
Reducing exhaust buried ball valve (length body)

产品型号 Product model	MQ61F-16/25C
公称通径 Nominal diameter	DN10~50mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品、天然气等 Water, gas, oil, natural gas etc.
适用温度 Suitable temperature	-29~200℃



球
阀

供热专用焊接球阀 Heating special welding ball valve	
产品型号 Product model	Q61F-16/25C
公称通径 Nominal diameter	DN10~600mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品、天然气等 Water, gas, oil, natural gas etc.
适用温度 Suitable temperature	-40℃~200℃



供热专用电动焊接球阀 Heating special electric welding ball valve	
产品型号 Product model	Q961F-16/25C
公称通径 Nominal diameter	DN10~600mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品、天然气等 Water, gas, oil, natural gas etc.
适用温度 Suitable temperature	-40℃~200℃

保温球阀 Insulation ball valve	
产品型号 Product model	BQ61F-16/25C
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、硝酸、醋酸等 Water, nitric acid, acetic acid etc.
适用温度 Suitable temperature	≤ 120℃



天然气专用球阀 Special for naturd gas ball valve	
产品型号 Product model	Q41F-16/25C
公称通径 Nominal diameter	DN15~150mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	液化气、天然气等 Liquid gas, natural gas etc.
适用温度 Suitable temperature	-40℃~80℃

气动V型球阀 Pneumatic V type ball valve	
产品型号 Product model	VQ647F-16/25C
公称通径 Nominal diameter	DN15~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~150℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

气动活塞凸轮挠曲调节(切断)阀
Pneumatic piston cam deflection regulate(cut off)valve

产品型号 Product model	HB2810-16/25C
公称通径 Nominal diameter	DN25-300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	耐泥浆、煤浆、粉尘、颗粒等 Proof slurry, coal paste, dust, grain etc.
适用温度 Suitable temperature	-10℃~425℃



气动偏心耐磨超硬密封面半球阀
Pneumatic eccentric wear superhard sealing surface of the semi-ball valve

产品型号 Product model	Q647SY-16/25C
公称通径 Nominal diameter	DN25~400mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	煤粉、煤渣等 Pulverized coal, coal cinder etc.
适用温度 Suitable temperature	-120℃~1200℃

液动卸灰球阀
Hydraulic cinder ball valve

产品型号 Product model	Q747F-2.5
公称通径 Nominal diameter	DN200~400mm
公称压力 Nominal pressure	PN0.25MPa
适用介质 Suitable medium	煤气、煤粉、烟气等 Coal gas, pulverized coal, flue gas etc.
适用温度 Suitable temperature	≥250℃



气动卸灰球阀
Pneumatic cinder ball valve

产品型号 Product model	Q647F-2.5
公称通径 Nominal diameter	DN200~400mm
公称压力 Nominal pressure	PN0.25MPa
适用介质 Suitable medium	煤气、煤粉、烟气等 Coal gas, pulverized coal, flue gas etc.
适用温度 Suitable temperature	≥250℃

电动卸灰球阀
Electric cinder ball valve

产品型号 Product model	Q947F-2.5
公称通径 Nominal diameter	DN200~400mm
公称压力 Nominal pressure	PN0.25MPa
适用介质 Suitable medium	煤气、煤粉、烟气等 Coal gas, pulverized coal, flue gas etc.
适用温度 Suitable temperature	≥250℃



球
阀

不锈钢丝扣球阀 Stainless steel screw thread ball valve	
产品型号 Product model	Q11F-16/25P
公称通径 Nominal diameter	DN15~50mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	耐酸、碱等 Acidproof and alkali etc.
适用温度 Suitable temperature	-10℃~150℃



气动三通球阀 Pneumatic three way ball valve	
产品型号 Product model	Q615F-16/25P
公称通径 Nominal diameter	DN6~50mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	耐酸、碱等 Acidproof and alkali etc.
适用温度 Suitable temperature	-10℃~150℃

内螺纹电动球阀 Electric rifled ball valve	
产品型号 Product model	Q911F-16/25P
公称通径 Nominal diameter	inch1/4"~3"
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	耐酸、碱等 Acid and alkali etc.
适用温度 Suitable temperature	+10℃~150℃



气动高温球阀 Pneumatic high temperature ball valve	
产品型号 Product model	QZ641M-16/25C
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~350℃

电动高温球阀 Electric high temperature ball valve	
产品型号 Product model	QZ941M-16/25P
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~350℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

一体式球阀
One-piece ball valve

产品型号 Product model	Q41SM-16/25C
公称通径 Nominal diameter	DN15~100mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、硝酸、醋酸等 Water, nitric acid, acetic acid etc.
适用温度 Suitable temperature	≤ 150℃



意大利超薄型法兰球阀
Italy ultra-thin flange ball valve

产品型号 Product model	Q41F-16/25P
公称通径 Nominal diameter	DN15~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	-20℃~180℃



美标球阀
API Ball valve

产品型号 Product model	D41F-150Lb
公称通径 Nominal diameter	NPS 1/2"~8" inch
公称压力 Nominal pressure	Class 150~600Lb
适用介质 Suitable medium	水、气、油品等 Water, gas, oil etc.
适用温度 Suitable temperature	≤ 150℃



轨道球阀
Track ball valve

产品型号 Product model	GDQ347H-16/25C
公称通径 Nominal diameter	DN15~600mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	-30℃~400℃



上装式球阀
Tops ball valve

产品型号 Product model	DYQ340F/H-16/25P
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、油品、气体等 Water, gas and oil etc.
适用温度 Suitable temperature	-196℃~600℃

球
阀

用科技和服务缔造品牌
Build our brand with technology and service



水力控制阀系列

Hydraulic Control Valve Series





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TJVT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

遥控浮球阀
Remote control superficial ball valve

产品型号 Product model	100X-10/16
公称通径 Nominal diameter	DN32~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃



减压阀
Decompress valve

产品型号 Product model	200X-10/16
公称通径 Nominal diameter	D50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃

缓闭式止回阀
Delaying closes check valve

产品型号 Product model	300X-10/16
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃



流量控制阀
Flow control valve

产品型号 Product model	400X-10/16
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃



持压泄压阀
Safety valve

产品型号 Product model	500X-10/16
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃



水力控制阀

电动控制阀 Electric control valve	
产品型号 Product model	600X-10/16
公称通径 Nominal diameter	DN32~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃



水泵控制阀 Pump control valve	
产品型号 Product model	700X-10/16
公称通径 Nominal diameter	D50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃

压差旁通控制阀 Pressure bypass control valve	
产品型号 Product model	800X-10/16
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃



紧急关闭阀 Emergency shut down valve	
产品型号 Product model	900X-10/16
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃

定水位阀 Set water valve	
产品型号 Product model	100D-10/16
公称通径 Nominal diameter	DN20~800mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	≤80℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

遥控浮球阀
Controls remotely float ball valve

产品型号 Product model	F745X-10/16
公称通径 Nominal diameter	DN40~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~80℃



安全泄压/持压阀
Safe pressure discharge/retain valve

产品型号 Product model	AX742X-10/16
公称通径 Nominal diameter	DN40~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~80℃

可调式减压稳压阀
Adjustable vacuum regulator valve

产品型号 Product model	YX741X-10/16
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~80℃



多功能水泵控制阀
Multi-purpose water pump control valve

产品型号 Product model	JD745X-10/16
公称通径 Nominal diameter	DN50~1000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~80℃



电动遥控阀
Electric operated remote-controlled valve

产品型号 Product model	J145X-10/16
公称通径 Nominal diameter	DN40~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~80℃



水力控制阀

液压水位控制阀 Hydraulic pressure water level control valve	
产品型号 Product model	H142X-10/16
公称通径 Nominal diameter	DN40~350mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~80℃



角式消声水位控制阀 Angle muffler level control valve	
产品型号 Product model	100A-10/16
公称通径 Nominal diameter	D50~300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	≤ 80℃

自力式压差控制阀 Loco mobile pressure difference control valve	
产品型号 Product model	ZYC-10/16
公称通径 Nominal diameter	DN15~350mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~100℃



自力式流量控制阀 Loco mobile flow control valve	
产品型号 Product model	ZL47F-10/16
公称通径 Nominal diameter	DN15~350mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、油等 Water, oil etc.
适用温度 Suitable temperature	0℃~100℃

自力式平衡阀 Loco mobile balance valve	
产品型号 Product model	ZL47F-10/16
公称通径 Nominal diameter	DN15~350mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、油等 Water, oil etc.
适用温度 Suitable temperature	0℃~100℃



其他阀系列

Other Valve Series



电动套筒调节阀 Electric sleeve regulating valve	
产品型号 Product model	ZAZM-16/25C
公称通径 Nominal diameter	DN20~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-196℃~560℃



电动单座、双座调节阀 Electric single-seat, two-seater regulating valve	
产品型号 Product model	ZAZP/N-16/25C
公称通径 Nominal diameter	DN20~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-40℃~250℃

精小型气动调节阀 Miniature pneumatic regulating valve	
产品型号 Product model	ZJHP/ZJHM-16/25C
公称通径 Nominal diameter	DN20~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-20℃~450℃



自力式压力调节阀 Self-pressure regulating valve	
产品型号 Product model	ZZYP-16/25C
公称通径 Nominal diameter	DN20~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	气体、蒸汽、低粘度液体等 Gas, steam, low-viscosity liquid etc.
适用温度 Suitable temperature	≤ 350℃

自力式温度调节阀 Self-temperature regulating valve	
产品型号 Product model	ZZWP-16/25C
公称通径 Nominal diameter	DN15~250mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-40℃~85℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

电动动态平衡调节阀
Electric dynamic balance regulating valve

产品型号 Product model	EDRV-10/16
公称通径 Nominal diameter	DN40~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃



法兰调节阀
Flange regulating valve

产品型号 Product model	T40F-10/16
公称通径 Nominal diameter	DN15~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、蒸汽等 Water, vapour etc.
适用温度 Suitable temperature	-10℃~425℃

平衡阀
Balance valve

产品型号 Product model	KPF-10/16
公称通径 Nominal diameter	DN15~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	0℃~100℃



数字锁定平衡阀
Lock show word balanced valve

产品型号 Product model	SP45F-10/16
公称通径 Nominal diameter	DN20~500mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、蒸汽等 Water, steam etc.
适用温度 Suitable temperature	0℃~120℃

减压稳压阀
Regulator pressure reducing valve

产品型号 Product model	Y416X/110X-10/16
公称通径 Nominal diameter	DN15~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	0℃~90℃



其
他
阀

弹簧活塞式减压阀 Piston spring pressure reducing valve	
产品型号 Product model	Y42X-16/25C
公称通径 Nominal diameter	DN20~600mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	0℃~90℃



活塞式蒸汽减压阀 Piston steam pressure reducing valve	
产品型号 Product model	Y43H/Y-16/25C
公称通径 Nominal diameter	DN15~500mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽等 Water, steam etc.
适用温度 Suitable temperature	-10℃~425℃

倒流防止器 Backflow prevention device	
产品型号 Product model	DF41-10/16
公称通径 Nominal diameter	DN40~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	10℃~121℃



防污隔断阀 Sludge-proof block-up valve	
产品型号 Product model	HS41X-10/16
公称通径 Nominal diameter	DN50~600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	0℃~80℃

Y型过滤器 Y filter	
产品型号 Product model	GL41H-10/16
公称通径 Nominal diameter	DN15~500mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、蒸汽等 Water, steam etc.
适用温度 Suitable temperature	-10℃~200℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

出口型过滤器
Export type filter

产品型号 Product model	GL41H-10/16
公称通径 Nominal diameter	DN25~300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~200℃



铸钢Y型过滤器
Cast steel Y filter

产品型号 Product model	GL41H-16/25C
公称通径 Nominal diameter	DN15~500mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	-10℃~200℃

直通蓝式过滤器
Straight-through blue filter

产品型号 Product model	SRB-16/25C
公称通径 Nominal diameter	DN25~800mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、蒸汽、油品等 Water, steam, oil etc.
适用温度 Suitable temperature	0℃~80℃



自动反冲洗过滤器
Auto-against washing filter

产品型号 Product model	ZPG-16/25C
公称通径 Nominal diameter	DN40~1600mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~425℃



快速反冲除污器
Quick kick dirt separator

产品型号 Product model	KC-16/25C
公称通径 Nominal diameter	DN50~800mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~425℃



其他
阀

复合式排气阀 Compound air release valve	
产品型号 Product model	CARX-10/16
公称通径 Nominal diameter	DN25-200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃



法兰双口排气阀 Air release valve	
产品型号 Product model	QB2-10/16
公称通径 Nominal diameter	DN40-300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~120℃

单口丝扣排气阀 Single port threaded exhaust valve	
产品型号 Product model	KP11X-10/16
公称通径 Nominal diameter	DN15-400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	清水等 Clean water etc.
适用温度 Suitable temperature	-40~425℃



单口快速排(吸)气阀 Single-port Fast platoon (gully) valve	
产品型号 Product model	P41/42X-10/16
公称通径 Nominal diameter	DN15~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	清水等 Clean water etc.
适用温度 Suitable temperature	-10℃~120℃

污水复合式排气阀 Sewage composite valve	
产品型号 Product model	SCAR-10/16
公称通径 Nominal diameter	DN50~250mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、污水等 Water, sewage etc.
适用温度 Suitable temperature	-10℃~120℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

角式隔膜排泥阀
Angle diaphragm mud valve

产品型号 Product model	HB100S-10/16
公称通径 Nominal diameter	DN50~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、污水等 Water, sewage etc.
适用温度 Suitable temperature	≤ 80 °C



膜片式液压、气动快开排泥阀
Diaphragm type hydraulic, pneumatic quick-open mud valve

产品型号 Product model	JM744/644X-10/16
公称通径 Nominal diameter	DN50~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、污水等 Water, sewage etc.
适用温度 Suitable temperature	≤ 80 °C

液动、气动角式排泥阀
Hydraulic, pneumatic angle-type mud valve

产品型号 Product model	J744/644X-10/16
公称通径 Nominal diameter	DN80~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、污水等 Water, sewage etc.
适用温度 Suitable temperature	≤ 80 °C



池底排泥阀
Pond bottom mud valve

产品型号 Product model	JM742X-10/16
公称通径 Nominal diameter	DN100~400mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、污水等 Water, sewage etc.
适用温度 Suitable temperature	≤ 80 °C



排污阀
Drainage valve

产品型号 Product model	Z44H-16/25C
公称通径 Nominal diameter	DN15~100mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、污水等 Water, sewage etc.
适用温度 Suitable temperature	-10 °C~450 °C



其
他
阀

自由浮球疏水阀 Free ball float steam trap	
产品型号 Product model	CS41H-16/25C
公称通径 Nominal diameter	DN15~150mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-23℃~425℃



丝扣自由浮球疏水器 Screw free ball float steam trap	
产品型号 Product model	CS11H-16/25C
公称通径 Nominal diameter	DN15~50mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-23℃~425℃

Y型热动力式疏水阀 Y Type hot power steam trap	
产品型号 Product model	CS19H-16/25C
公称通径 Nominal diameter	DN15~100mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-23℃~425℃



热动力(圆盘式)疏水器 Hot power (Sihestatic) steam trap	
产品型号 Product model	CS49H-16/25C
公称通径 Nominal diameter	DN15~300mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-23℃~425℃

不锈钢安全阀 Stainless steel safety valve	
产品型号 Product model	A41H-16/25P
公称通径 Nominal diameter	DN10~50mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、空气、氮氢混合气等 Water, gas, nitrogen hydrogen mixture gas etc.
适用温度 Suitable temperature	≤200℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

弹簧微启式安全阀
Spring low lift safety valve

产品型号 Product model	A47H/Y-16/25C
公称通径 Nominal diameter	DN25~200mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、石油等 Water, gas, petroleum etc.
适用温度 Suitable temperature	≤ 300℃



弹簧全启式安全阀
Spring all opening safety valve

产品型号 Product model	A48H/Y-16/25C
公称通径 Nominal diameter	DN20~400mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	水、气、石油等 Water, gas, petroleum etc.
适用温度 Suitable temperature	≤ 350℃

仪表针形截止阀
Meter needle type globe valve

产品型号 Product model	J13H-16/25P
公称通径 Nominal diameter	DN15~50mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	硝酸、醋酸类等 Nitric acid, acetic acid etc.
适用温度 Suitable temperature	≤ 560℃



铬镍不锈钢焊接针形阀
Chrome-nickel stainless steel welded needle valve

产品型号 Product model	J23W-16/25P
公称通径 Nominal diameter	DN6~25mm
公称压力 Nominal pressure	PN1.6~2.5MPa
适用介质 Suitable medium	酸类、蒸汽、油品等 A etc, steam, oil etc.
适用温度 Suitable temperature	≤ 425℃

防爆波安全阀
Explosion-proof wave safety valve

产品型号 Product model	FA49H-10/16
公称通径 Nominal diameter	DN40~200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	清水等 Clean water etc.
适用温度 Suitable temperature	0℃~80℃



其他
阀

橡胶软接头 Soft rubber joints	
产品型号 Product model	JGD-10/16
公称通径 Nominal diameter	DN25~800mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~80℃



可曲挠双球体橡胶接头 Flexing double sphere rubber joint	
产品型号 Product model	JGD-A-10/16
公称通径 Nominal diameter	DN50~300mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气、油品等 Water, gas and oil etc.
适用温度 Suitable temperature	-10℃~80℃

三片式法兰限位伸缩器 Three-piece flange limited expansion joints	
产品型号 Product model	SCT-10/16
公称通径 Nominal diameter	DN50~1600mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas.
适用温度 Suitable temperature	-10℃~100℃



双法兰传力接头 Double flanged Transmission Joint	
产品型号 Product model	VSSJAF-10/16
公称通径 Nominal diameter	DN65~3200mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-10℃~100℃

法兰式鸭嘴阀 Flange duckbill valve	
产品型号 Product model	XH41-10/16
公称通径 Nominal diameter	DN100~2000mm
公称压力 Nominal pressure	PN1.0~1.6MPa
适用介质 Suitable medium	污水等 Polluted water etc.
适用温度 Suitable temperature	



黄铜阀系列

Brass Valve Series



黄铜闸阀 Brass gate valve	
产品型号 Product model	Z15/45W-16T
公称通径 Nominal Diameter	DN15~100mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤ 150℃



黄铜截止阀 Brass globe valve	
产品型号 Product model	J11/41W-16T
公称通径 Nominal Diameter	DN15~150mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤ 150℃

黄铜球阀 Brass ball valve	
产品型号 Product model	Q11/41F-16T
公称通径 Nominal Diameter	DN8~100mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤ 110℃



黄铜三通球阀 Brass three way ball valve	
产品型号 Product model	Q14F-16T
公称通径 Nominal Diameter	DN15~50mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤ 120℃

磁性带锁球阀 Magnetic with lock ball valve	
产品型号 Product model	Q11W/F-16T
公称通径 Nominal Diameter	DN15~50mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤ 150℃





东北石油大学
NORTHEAST PETROLEUM UNIVERSITY

TMT

津滨阀门
JINBIN VALVE

产品介绍
Product Introduction

磁性带锁过滤器球阀
Magnetic with lock filter ball valve

产品型号 Product model	Q11F-16T
公称通径 Nominal Diameter	DN20~32mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤ 150 °C



黄铜卧式止回阀
Brass horizontal type check valve

产品型号 Product model	H14/44W-16T
公称通径 Nominal Diameter	DN15~200mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤ 150 °C

黄铜法兰过滤器
Brass flanged filter

产品型号 Product model	GL11/41W-16T
公称通径 Nominal Diameter	DN15~300mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	≤ 150 °C



电动二通阀
Electric two valve

产品型号 Product model	HV2000-16
公称通径 Nominal Diameter	DN15~50mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、蒸汽等 Water, steam etc.
适用温度 Suitable temperature	-20 °C~100 °C

静态平衡阀
Static balance valve

产品型号 Product model	SP15F-16
公称通径 Nominal Diameter	DN15~50mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、气等 Water, gas etc.
适用温度 Suitable temperature	-20 °C~110 °C



黄
铜
阀

黄铜减压阀 Brass decompress valve	
产品型号 Product model	Y12X/200P-16
公称通径 Nominal Diameter	DN15~65mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	≤110℃



全铜排气阀 Brass exhausting valve	
产品型号 Product model	P15W-16T
公称通径 Nominal Diameter	DN15~25mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水、蒸汽等 Water, steam etc.
适用温度 Suitable temperature	≤100℃

黄铜浮球阀 Brass float ball valve	
产品型号 Product model	XF-X1/2
公称通径 Nominal Diameter	DN15~300mm
公称压力 Nominal Pressure	PN0.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	≤60℃



自动温控阀 Automatic temperature control valve	
产品型号 Product model	J631X-16T
公称通径 Nominal Diameter	DN15~20mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	6℃~28℃

暖气直式截止阀 Heating's straight-style cut-off valve	
产品型号 Product model	JNFT-16N
公称通径 Nominal Diameter	DN15~20mm
公称压力 Nominal Pressure	PN1.6MPa
适用介质 Suitable medium	水等 Water etc.
适用温度 Suitable temperature	-10℃~100℃

